



## MODEL #81

Dual Lane Inline Piston Filler / Automatic Piston Filler / Inline Filler

### Description:

Automatic inline dual piston filler featuring stainless steel construction, automatic denesting, automatic container transfer, automatic piston fill and automatic lid placing and closing. Available in single and dual lane configurations.

### Products:

Potato salad, cottage cheese, sour cream or similar products that can be pumped with a piston depositor.

### Key Features:

- Up to four filling lanes available
- Right or left hand operation
- Indexing chain flites
- Automatic lid placing & closing
- No container / no fill / no lid feature
- Intermittent product flow
- Heavy duty Camco® mechanical indexer with variable speed drive
- Electro Cam® programmable limit switch
- Dual model #133 piston depositors
- Designed for easy washdown
- Locking swivel casters and leveling pads
- Speeds to 85 cpm
- 304 stainless steel construction

### Container Size Range:

- 5 through 64 ounce containers

### Container Types:

- Round, oval or square nestyle
- Straight wall round


### Options Available:

- Tamper evident membrane seal section
- Tooling for multi-size containers on one filler
- Custom tooling available
- Spare parts kit



### Specifications:

- Length: 9' 10"
- Width: 2' 5 3/8"
- Air requirements: 20 cfm @ 80 psi
- Electrical requirements: 220 V AC, 3 Phase, 60 Hz
- Weight: 1500 lbs.

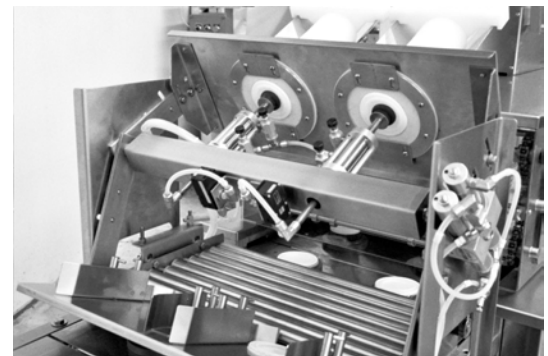

Reverse Lid  
Pick & Place

Camco® is a registered trademark of Industrial Motion Control, LLC  
Electro Cam® is a registered trademark of Electro Cam Corp.

The features, specifications and dimensions describes in this document are subject to change at any time without notice.